

ELEKTROTECHNICKÝ ZKUŠEBNÍ ÚSTAV



ELECTROTECHNICAL TESTING INSTITUTE - CZECH REPUBLIC
ELEKTROTECHNISCHE PRÜFANSTALT - TSCHHECHISCHE REPUBLIK
INSTITUT ELECTROTECHNIQUE D'ESSAIS - RÉPUBLIQUE TCHÉQUE
ЭЛЕКТРОТЕХНИЧЕСКИЙ ИСПЫТАТЕЛЬНЫЙ ИНСТИТУТ - ЧЕШСКАЯ РЕСПУБЛИКА

Pod lisem 129/2, Troja, 182 00 Praha 8

CERTIFICATE

No.: 2140036

Ordering firm: KOPOS KOLÍN a.s.
Havlíčkova 432, Kolín IV, 280 02 Kolín, Czech Republic

Manufacturer/Licence holder: KOPOS KOLÍN a.s.
Havlíčkova 432, Kolín IV, 280 02 Kolín, Czech Republic

Production site: KOPOS KOLÍN a.s.
Havlíčkova 432, Kolín IV, 280 02 Kolín, Czech Republic

Name of product: Rigid conduit for medium mechanical strength with accessories

Trade name:

Type of product: see Annex

Rating: do 1000 V AC, 750 N (see Annex)

Electrotechnical Testing Institute on the basis of fulfillment the requirements of the „ESČ Mark” certification scheme is granting a licence for using the following mark



This mark may be used for the product specified in this certificate within validity of the Agreement on the use of the ESČ Mark by implementing all the rules stated in the Agreement.

The right to use the above mentioned mark for the product is based on:

- Test report No. 402423-01/01 of: 27.06.2014

A sample of the product was tested and found to be in conformity with:

ČSN EN 61386-21:04+A11:11 (IEC 61386-21:2002),
ČSN EN 61386-1 ed. 2:09 (IEC 61386-1:2008)

- inspection at manufacturing site according to Permanent Documents CIG 023 and CIG 024 No. 304991-01 of: 11.05.2013
- the Agreement on the use of the ESČ Mark No. 402423 concluded between the ordering firm and the Electrotechnical Testing Institute

Other data:

30.06.2014 Corr. 19.04.2024

Prague

Mgr. Miroslav Sedláček
Head of Certification Body



402423-01

Tuhé elektroinstalační trubky se střední mechanickou odolností a příslušenství – 750 N
Rigid wiring conduit for medium mechanical loading with accessories – 750 N

Použitý rozsah teplot / Utilization range from: –25°C až +60°C
materiál/ material: PVC
Kód třídění dle/ Code classification: ČSN EN 61386-1 3341

Typ Type	Koleno Bends	ohébné koleno Bends, flexible	Spojky Couplings	Přichytky Clamps
4016 E	4116, 4116 E	1316, 1316 E	0216, 0216 E	5316, 5316 E
4020	4120	1320	0220	5320
4025	4125	1325	0225	5325
4032	4132	1332	0232	5332
4040	4140	1340	0240	5340
4050	4150	1350	0250	5350
4063	4163	1363	0263	5363


Tuhé elektroinstalační trubky se střední mechanickou odolností bezhalogenové a příslušenství – 750 N
Rigid wiring conduit for medium mechanical loading halogenfree with accessories – 750 N

použitý rozsah teplot/ Utilization range from: –45°C až +90°C
materiál/ material: PPO – bezhalogenový/halogenfree
Kód třídění dle/ Code classification: ČSN EN 61386-1 3352

Typ Type	Koleno Bends	ohébné koleno Bends, flexible	Spojky Couplings	Přichytky Clamps
4016 E HF	4116 HF, 4116 E HF	1316 HF, 1316 EHF	0216 HF, 0216 EHF	5316 HF, 5316 E HF
4020 HF	4120 HF	1320 HF	0220 HF	5320 HF
4025 HF	4125 HF	1325 HF	0225 HF	5325 HF
4032 HF	4132 HF	1332 HF	0232 HF	5332 HF
4040 HF	4140 HF	1340 HF	0240 HF	5340 HF
4050 HF	4150 HF	1350 HF	0250 HF	5350 HF
4063 HF	4163 HF	1363 HF	0263 HF	5363 HF

použitý rozsah teplot/ Utilization range from: –45°C až + 140°C
materiál/ material: PPO – bezhalogenový/halogenfree
Kód třídění dle/ Code classification: ČSN EN 61386-1 3354

Typ Type	Koleno Bends	ohébné koleno Bends, flexible	Spojky Couplings	Přichytky Clamps
4016 E HF 140	4116 HF140, 4116 E HF 140	1316 HF 140, 1316 EHF 140	0216 HF 140, 0216 EHF 140	5316 HF 140, 5316 E HF 140
4020 HF 140	4120 HF 140	1320 HF 140	0220 HF 140	5320 HF 140
4025 HF 140	4125 HF 140	1325 HF 140	0225 HF 140	5325 HF 140
4032 HF 140	4132 HF 140	1332 HF 140	0232 HF 140	5332 HF 140
4040 HF 140	4140 HF 140	1340 HF 140	0240 HF 140	5340 HF 140
4050 HF 140	4150 HF 140	1350 HF 140	0250 HF 140	5350 HF 140
4063 HF 140	4163 HF 140	1363 HF 140	0263 HF 140	5363 HF 140

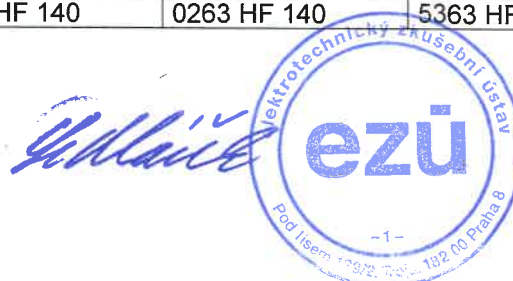

Tuhé elektroinstalační trubky se střední mechanickou odolností bezhalogenové a příslušenství – 750 N
Rigid wiring conduit for medium mechanical loading halogenfree with accessories – 750 N

použitý rozsah teplot/ Utilization range from: **-45°C až +90°C**

materiál/ material: **PC+ABS – bezhalogenový/halogenfree**

Kód třídění dle/ Code classification: **ČSN EN 61386-1 3352**

Typ Type	Koleno Bends	ohybné koleno Bends, flexible	Spojky Couplings	Přichytky Clamps
4016 E HF	4116 HF, 4116 E HF	1316 HF, 1316 EHF	0216 HF, 0216 EHF	5316 HF, 5316 E HF
4020 HF	4120 HF	1320 HF	0220 HF	5320 HF
4025 HF	4125 HF	1325 HF	0225 HF	5325 HF
4032 HF	4132 HF	1332 HF	0232 HF	5332 HF
4040 HF	4140 HF	1340 HF	0240 HF	5340 HF
4050 HF	4150 HF	1350 HF	0250 HF	5350 HF
4063 HF	4163 HF	1363 HF	0263 HF	5363 HF

Barva dle přání zákazníka/Colour according to customer

19.04.2024

