

item number	D (mm)	L (mm)	D2 (mm)	K max. (mm)	TORX	🔥
<b>STP 2.9X9.5 TX_ZNCR</b>	2,9	9,5	5,6	2,2	TX10	🔥
<b>STP 4.2X25 TX_ZNCR</b>	4,2	25	8,2	3,05	TX20	



product description: self-drilling sheet metal screw with half-round head and TORX slot

STP 4.2X25 TX is suitable for attaching the cable tray to the PPS1 L30 support pad


STP 2.9X9.5 TX can be used to fix the cover to the cable tray

standard: DIN 7504N

surface finish: ZNCR - Electrolytic Zink coating

klasifikace 🔥: ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90  
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: ČSN EN 60721-3-1

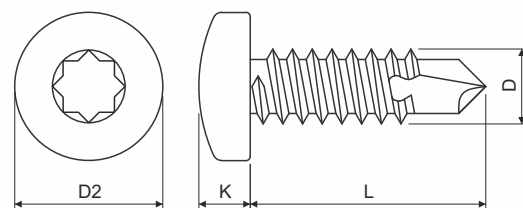

## ⚠️ WARNING

### Corrosion and Environmental Exposure

The screws feature a ZNCR surface treatment (electrolytic zinc plating), which provides limited protection against corrosion. In aggressive or humid environments (e.g., industrial facilities, outdoor installations, or chlorine-containing atmospheres), accelerated corrosion may occur.

### Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



STP



plastic bag