


type number	width of cable tray	thickness of metal sheet	weight kg/m	amount of bolts for connection
KZI 85X100X0.75_S	100	0,75	1,56	6
KZI 85X150X0.75_S	150	0,75	1,81	6
KZI 85X200X0.75_S	200	0,75	2,15	7
KZI 85X300X1.00_S	300	1,00	3,10	7
KZI 85X400X1.00_S	400	1,00	4,15	8

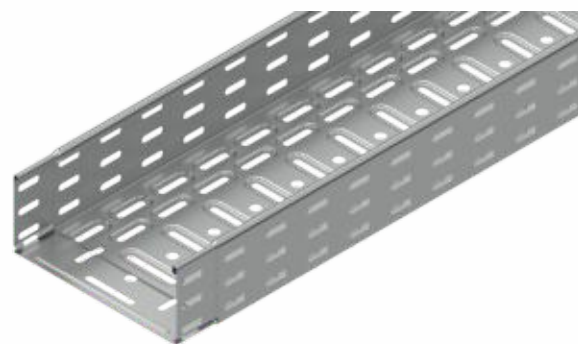

height of cable tray: 85 mm

length of cable tray: 3000 mm


product description: Cable tray is designed to create a cable route.
For securing the connection of the trays with the integrated coupling there are used the clamps made from spring steel KSV or the bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish.
These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15 - 27 µm


sales amount: á 3 m

meets the requirements: EN 61537:02






storage: EN 60721-3-1

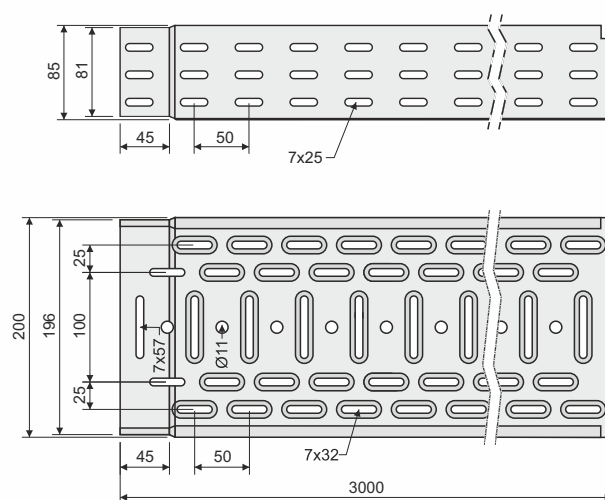

The graph show the maximum allowed even loading of the tray in relation to the distances of the supports.

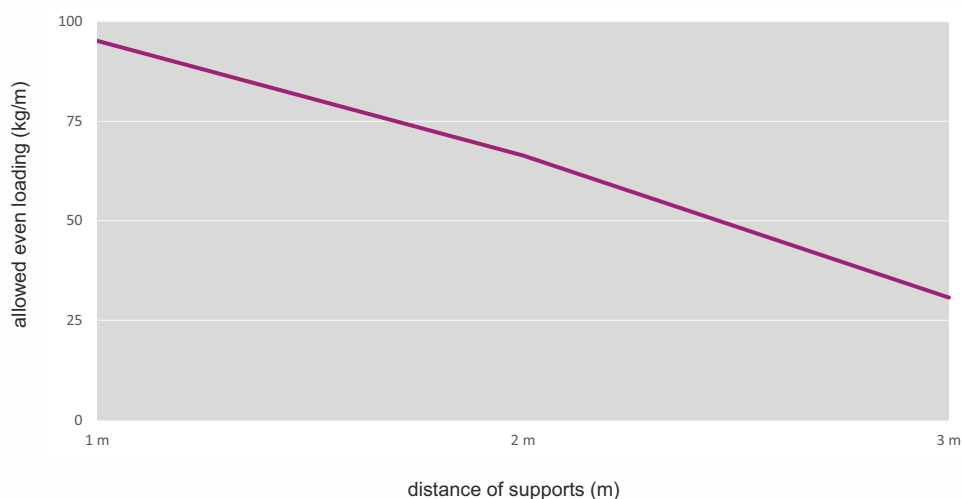

External influences are not taken into account in the permissible load and cannot be burdened by person.

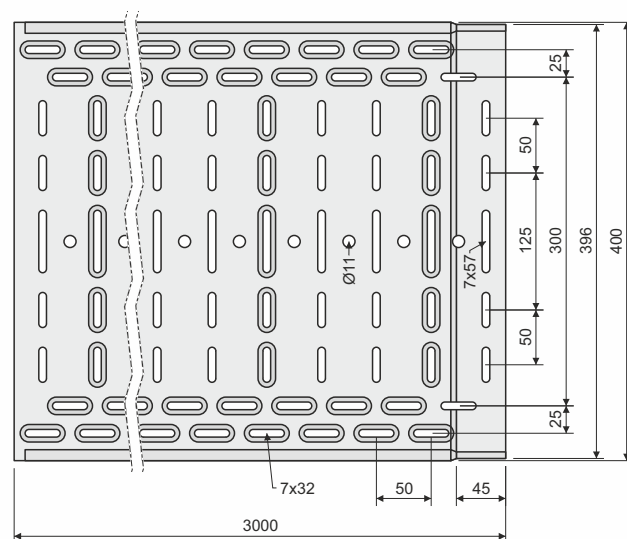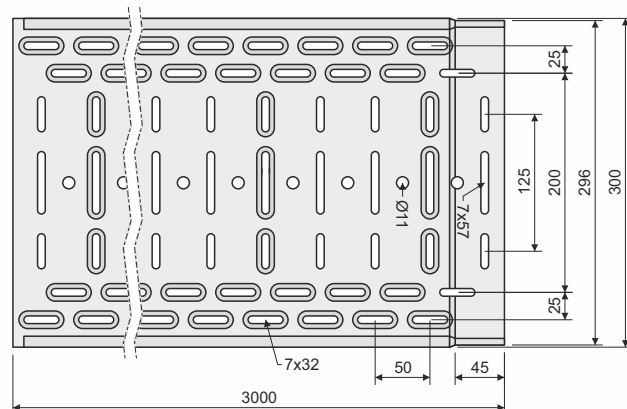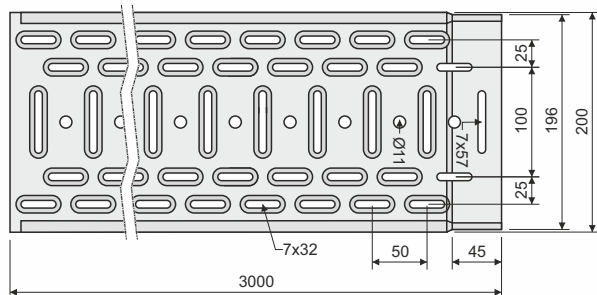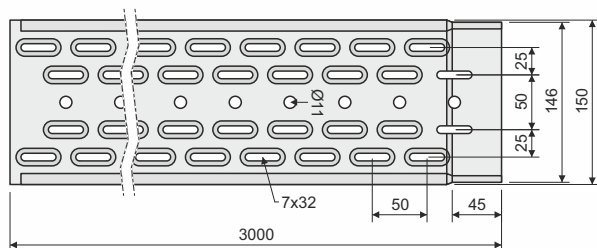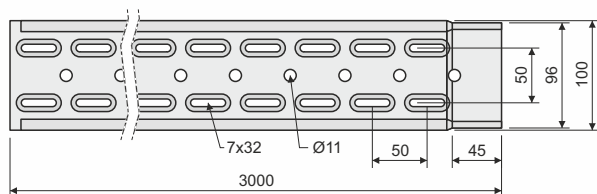

inner usable cross-section of the channel

	KZI	85X100	85X150	85X200	85X300	85X400
cross-section (cm ²)		85	127,5	170	255	340
utilization 60% (cross-section cm ²)		51	76,5	102	153	204
CYKY 3X1,5	Ć 8,6	87	131	175	263	351
CYKY 5X1,5	Ć 10,1	63	95	127	191	254
CYKY 3X2,5	Ć 9,5	71	107	143	215	287
CYKY 5X2,5	Ć 11,2	51	77	103	155	207
CYKY 3X4	Ć 11,2	51	77	103	155	207
CYKY 5X4	Ć 13,8	34	51	68	102	136
CYKY 5X6	Ć 15,1	28	42	56	85	113
CYKY 5X10	Ć 18	20	30	40	60	80
CYKY 5X16	Ć 20,4	15	23	31	46	62
CYKY 5X25	Ć 26,1	9	14	19	28	38
CYKY 4X35	Ć 24,8	10	15	21	31	42
CYKY 4X50	Ć 31,3	6	9	13	19	26
CYKY 3X70+50	Ć 33,6	5	8	11	17	23
CYKY 3X95+70	Ć 39,3	4	6	8	12	16
CYKY 3X120+95	Ć 43	3	5	7	10	14
CYKY 3X240+120	Ć 56,4	2	3	4	6	8

The values state the number of cables with the tray at 60% full. Orientation diameters of the cables CYKY.

The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Risk of system collapse

It is essential to strictly adhere to the maximum load limits for individual cable support systems and ensure proper installation according to the installation manual. The load capacity charts for each system are provided in the manufacturer's catalog, available in printed form or on the manufacturer's website. The specified load limits do not account for any additional loads, such as snow, wind, or seismic forces.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



cable tray



binding tape