


item number	A mm	for width of cable tray mm	thickness of metal sheet mm	weight kg/ps
DV 75_S DV 75_ZM	68	75	1,5	0,07
DV 100_S DV 100_ZM	75	100	1,5	0,08
DV 150_S DV 150_ZM	125	150	1,5	0,13
DV 200_S DV 200_ZM	175	200	1,5	0,18
DV 300_S DV 300_ZM	275	300	1,5	0,29
DV 400_S DV 400_ZM	375	400	1,5	0,39
DV 500_S DV 500_ZM	475	500	1,5	0,50
DV 600_S DV 600_ZM	575	600	1,5	0,60

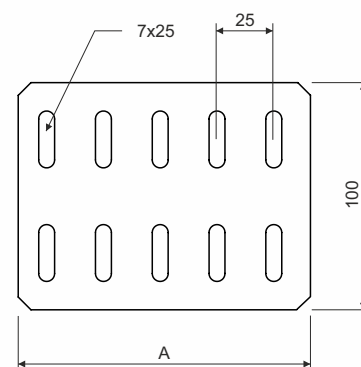

product description:

Is used for reinforcing the tray connections without integrated coupling.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

ZM surface reinforcement plate shall be used for ZM or F surface finish trays.

GMT surface finish bolts shall be used for ZM or F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount:

à 1 pc

meets the requirements: ČSN EN 61537:02

storage:

ČSN EN 60721-3-1



**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



DV